

RTS HEX CASSETTE TORQUE WRENCH




The versatile RTS Hex Drive Series supports an extensive range of interchangeable hexagon ratchet links that deliver a torque range of 150 ft.lbs – 30,000 ft.lbs.

They deliver precision torque during the bolting process and maximum torque during bolt breakout. Ratchet Links are also interchangeable with some other major brand tools.

Standard Features

- Compact/Lightweight Design
- 360 Hose Swivel Assembly
- Anti-Windup Torque Release Lever
- Interchangeable cassettes available in both metric and imperial
- Ratchet Links are interchangeable with some other major brands
- Best in industry power to weight ratio
- 1 Year Warranty

Hex Cassette Dimensions

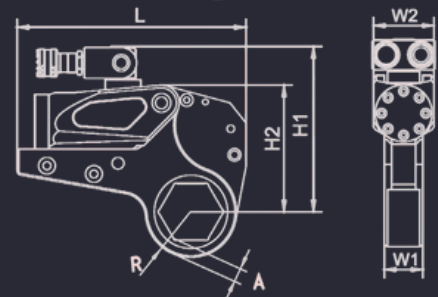

RTS Power Head



RTS Power Head

- Working pressure: 10,000 PSI max
- 360 degree adjustable swivel assembly come standard with the tool. 180 degree swivel assembly is available on request
- Accuracy of +/- 3%
- Compact design using composite materials to give improved strength
- Weatherproof site box available on request

RTS HEX POWER HEAD

PART NUMBER	DRIVE CYLINDER KG	CASSETTE SUITABLE FOR POWER HEAD
RTS HPH2	1.0	RTS HHL2
RTS HPH4	2.0	RTS HHL4
RTS HPH8	3.3	RTS HHL8
RTS HPH14	5.5	RTS HHL14
RTS HPH30	11.4	RTS HHL30

RTS CASSETTE LINK OPTIONS

Model	Hex Size (mm) *	Torque		Weight Kg	Dimension (mm)						
		Nm	Ft.Lbs		L	H1	H2	W1	W2	A	R
RTS-HHL2	19 - 55	232 - 2328	171 - 1717	1.6	196.4	125.9	102.3	32	51	9.9-16.0	26.9-42.0
	60	241 - 2414	178 - 1781	1.7	196.4	128.5	105	32	51	10.9	46
RTS-HHL4	34 - 36	585 - 2510	432 - 1851	4.4	245	177	135.7	42	66	14 - 16	36.1 - 53.1
	41	585 - 5021	432 - 3703	4.4	245	177	135.7	42	66	14 - 16	36.1 - 53.1
	46 - 65	585 - 5858	432 - 4321	4.6	246	187	145.7	42	66	15	55.9 - 61
	70 - 80	647 - 6474	477 - 4775	4.6	246	187	145.7	42	66	15	55.9 - 61
RTS-HHL8	41 - 95	1094 - 10941	807 - 8070	8	300	207	169	53	83	16 - 22.1	46 - 59.9
	100 - 105	1177 - 11774	868 - 8684	8.4	303.8	216.2	178.1	53	83	17	74.9 - 78
RTS-HHL14	50 - 117	1852 - 18499	1366 - 13644	11.6	361	239	204	64	99	19.1 - 31	59.9 - 87.2
RTS-HHL30	110 - 155	4188 - 41882	3089 - 30891	29	430	303	272	85	131	24.9 - 29	77 - 115.1
	160 - 175	4459 - 44593	3289 - 32890	30	441	315	285	85	131	26.9 - 36.1	121.9 - 128

*How to select your size: RTS - HHL2 - ###
= Specific size required