



RTS SQUARE DRIVE TORQUE WRENCH

The HSD Series Torque Wrenches take on the toughest bolting jobs without missing a beat. They deliver precision torque accuracy and maximum torque during bolt breakout.


They feature a compact design, constructed of aluminum – titanium alloy and super high-strength steel alloy for increased strength and durability while minimizing weight. A complete range of models are available with torques ranging from 82 ft-lbs. - 52,500 ft-lbs / 182 Nm - 72,000 Nm.

Standard Features

- Compact Design
- Aluminum/Titanium & Steel Alloy construction
- 360°Hose Swivel Assembly
- 1 Year Warranty
- Anti-Jam Torque Release Lever
- Best in industry power-to-weight ratio



Square Drive Dimensions

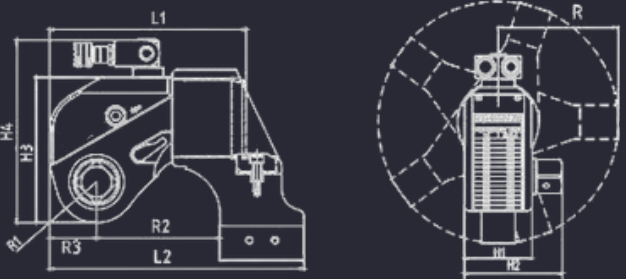

Model	Torque		Square Drive	Weight KG	DIMENSIONS (MM)							
	Nm.	Ft.Lbs			L1	L2	H1	H2	H3	H4	R1	R2
RTS-HSD1	182 - 1822	134 - 1344	¾"	2.5	135.89	185.93	50.04	80.01	97.54	131.06	25.91	99.06
RTS-HSD3	445 - 4444	328 - 3278	1"	5	169.93	244.09	68.07	104.9	128.02	205.99	34.04	135.89
RTS-HSD5	742 - 7416	547 - 5470	1½"	8.2	203.96	284.99	80.01	132.08	151.89	230.12	40.89	150.11
RTS-HSD8	1062 - 10617	783 - 7831	1½"	10.9	219.96	312.93	89.92	141.99	166.88	244.09	46.99	175.01
RTS-HSD10	1528 - 15283	1127 - 11272	1½"	15	245.11	352.04	103.12	154.94	180.09	260.1	51.05	182.63
RTS-HSD20	2626 - 26262	1937 - 19370	2½"	26.3	303.02	450.09	119.89	188.98	222	299.97	60.96	255.02
RTS-HSD25	3421 - 34202	2523 - 25226	2½"	34.9	323.09	401.07	136.91	202.95	246.89	296.93	66.04	198.88
RTS-HSD35	4793 - 47934	3535 - 35354	2½"	49.9	372.62	465.58	152.91	217.93	281.94	331.98	76.96	242.06
RTS-HSD50	7,200 - 72,000	5,230 - 52,300	2½"	87	400	516	160	223	291	341	81	259